

ERA Line of fans




- For continuous or repetitive exhaust ventilation of bathrooms, showers, kitchens, and other domestic premises.
- Fastening to the mounting spot is carried out using screws.
- The face panel of ERA 4 and ERA 5 is equipped with light indication.
- ERA 4 and ERA 5 can be implemented with a back-flow valve with a spring mechanism of OK-line for back draught protection (OK back-valve is not included and is purchased separately).
- ERA 4 and ERA 5 have a wide range of options.
- Ingress protection rating for the electrical equipment is IP24.

Dimensions

Article	A	X	E	d	C	F*
ERA 4	150	135	55	100	22	8
ERA 5	175	160	61	125	23	10
ERA 6	200	185	62	150	24	10

* referred only to fans equipped with a back-flow valve.

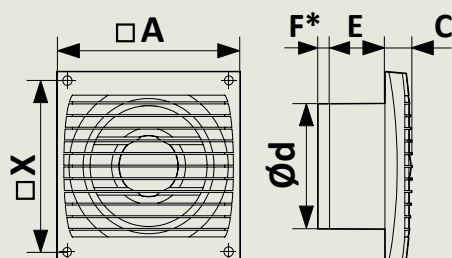

Back-flow valve



ERA C

Anti-mosquito net



ERA S

Pull-cord switch



ERA -02

Timer



ERA ET

Photo-sensor



ERA ETF

Humidity sensor



ERA HT



Technical specifications

Specifications	ERA 4	ERA 5	ERA 6
Diameter, mm	100	125	150
Power consumption, W	14	16	16
Capacity, m ³ /h	97	183	290
Pressure, Pa	28	50	42
Noise Level, dB(A)	35	36	38
Current consumption, A	0,06	0,07	0,07

Capacity diagram

